

# UB Series

## Linear DC Welding Controls




**UB-4000A: 200-4000 amp output, versatile energy range with excellent control**


**UB-500A: 5-500 amp output. UB-1500A: 15-1500 amp output designed with high resolution for precise control for micro welding**

The UB-4000A Linear DC welding control is ideal for applications which require exceptional control, fast rise times, and high quality throughput. UB-4000A requires only single phase input power and can output up to 4000 amps. Ultra-fast rise times permit short overall weld times, resulting in less part deformation and stronger welds. This is extremely important when welding heat sensitive parts such as battery cells or sensitive electronic devices.

UB-500A (5-500 amps), and UB-1500A (15-1500 amps) are Linear DC controls with feedback modes designed to adapt to part and process variables. These power supplies should be used for smaller applications where closed-loop feedback control and fast response times are required. Safety critical applications such as those found in the medical and automotive markets will benefit from UB-500A's precision low energy control.




**Straight forward rear panel I/O connections**

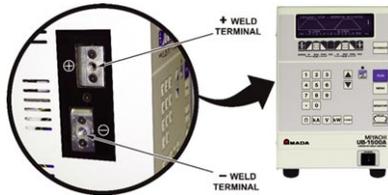

### KEY FEATURES

- Advanced closed-loop analog control yields repeatable and stable programmable waveforms
- Extremely fast rise times permit shorter weld times, less part deformation, longer electrode life, and greater weld strength with more part ductility
- Built-in monitor with graphical screen shows visual trace of energy over time, aiding in weld parameter optimization
- Side mounted weld cables and compact unit size increase installation options
- Single phase power input and simple I/O allows for easy setup and versatility of use


### TYPICAL APPLICATIONS



**Battery tab to lithium ion cell**



**Halogen lamp filaments**



**Catheter guide wire assembly**



**Air bag detonator module (squib wire)**



## INTUITIVE, EASY-TO-USE PROGRAMMING


- Intuitive graphical user interface
- Dual pulse waveforms programmed in current, voltage, or power control modes
- Programming times to 100 usec increments provides ultimate control
- Accurate, built-in monitor displays the graphical "trace" of weld current, voltage, power and resistance, along with numerical peak and average values
- Easy-to-set limits establish process window for acceptable quality
- User programmable relays can be used in conjunction with visual and audible signals for operators and automation interface

## CURRENT, VOLTAGE AND POWER FEEDBACK MODES:

### Constant Voltage: ..... (green dotted line)

- Compensates for parts misplacement and force problems
- Reduces weld splash
- Ideal for round (non-flat) parts


Monitor current



### Constant Power: - - - - - (orange dashed line)

- Varies current and voltage for consistent energy
- Breaks up surface oxides and plating
- Ideal for automation to extend electrode life


Monitor current or voltage



### Constant Current: \_\_\_\_\_ (solid black line)


- Delivers same current regardless of resistance changes
- Compensates for part thickness changes
- Ideal for flat parts with consistent electrode to part fit-up

Monitor voltage




### Combo:

- Ramp up in voltage mode and then switch to constant current
- Prevents sparks during energy ramp up
- Ideal for non-flat parts, inconsistent surfaces




## EFFECTIVE WELD MONITORING AND PROCESS TOOLS

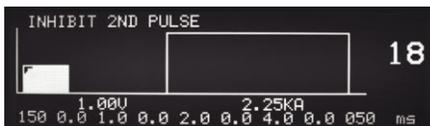

Run Screen – Shows that 2nd Pulse was inhibited from firing.




Run Screen – Constant power first pulse breaks through oxides.

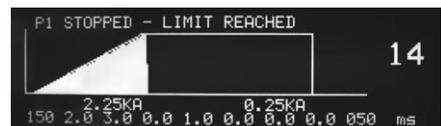

Run Screen – Shows termination of weld current during weld pulse.



Monitor Screen – Shows 1st Pulse weld current exceeded limit.

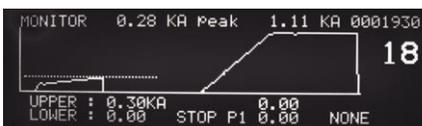

Monitor Screen – First pulse time automatically compensates for varying levels of oxides.



Monitor Screen – Shows weld current exceeding limit.

## PRE-WELD FUNCTION

Sends an initial short, low energy pulse through the assembly, tests key electrical parameters against pre-set limits, and inhibits operation if limits are exceeded.

### Advantages

- Prevents unacceptable welds
- Prevents electrode damage
- Alerts operator to weld fault
- Relay outputs can signal automation

## ACTIVE PART CONDITIONER (APC)

First pulse adapts weld time to displace oxides then terminates allowing a second pulse with upslope to complete the weld thus avoiding weld splash.

### Advantages

- Brings each part to the same resistance prior to application of welding current
- Provides for consistent welding of difficult-to-weld oxidized parts
- Prevents weld splash
- Increases process yields


## WELD STOP

Terminates the weld energy during the welding process if pre-set weld current or voltage limits are exceeded.

### Advantages

- Prevents blow-outs and parts damage
- Prevents electrode damage
- Alerts operator to weld fault
- Relay outputs can signal automation



## FULL RANGE OF WELD HEADS FOR THE COMPLETE WELDING SYSTEM



### TL-086B Precision Parallel Gap Weld Head

The TL-086B weld head with either foot or EZ-AIR® actuation provides


precision control for parallel gap welding applications from <math><0.001</math> inch (25 microns) to 0.005 inch (0.127 mm) in diameter or thickness. The force range of the TL-086B is 0.5 to 20 lbs. (2.2-89 N). EZ-AIR technology prevents overforce and guarantees force repeatability. The TL-086B is normally matched with the UB-500A or UB-1500A power supply.

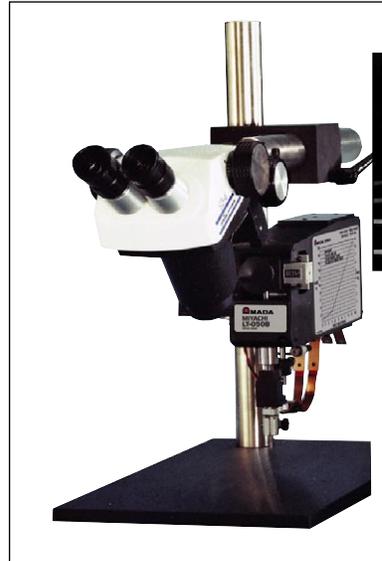

### LT-050B Light Force Weld Head

The LT-050B weld heads with either foot or air actuation provide accurate levels of precision

required for welding fine ribbons and wires to substrates. The force range of the LT-050B is 40-1000 gram-force (0.39 - 9.8 N), continuously adjustable with no overforce. Holder options for either UNITIP® or UNIBOND® electrodes are available. LT-050B is normally matched with the UB-500A or UB-1500A power supply.



### SR Series Weld Head

The servomotor driven SR Series weld head

with overforce protection and soft-touch part clamping provides superior force control from 0.5-15 lb. with excellent follow-up. The SR Series, available in both opposed and parallel gap can store 32 motion control schedules for position and speed. The heads are ideal for automation and delicate or critical parts welding and work well with either the UB-500A or UB-1500A.



### TL-088B Precision Weld Head

The fast rise time and precision control of the

UB-4000A make it ideal for battery pack welding. The TL-088B weld head, with either foot of EZ-AIR actuation provides fine levels of precision control required for microjoining applications from <math><0.001</math> inch (25 microns) to 0.04 inch (1 mm) in diameter or thickness. EZ-AIR prevents overforce and guarantees force repeatability. The EZ-Clean feature permits easy electrode set-up and maintenance.

## TECHNICAL SPECIFICATIONS

MODEL NUMBER	UB-500A	UB-1500A	UB-4000A
Nominal line voltages (single phase)	88-264 VAC 47-63 Hz	88-264 VAC 47-63 Hz	88-264 VAC 47-63 Hz
Repetition rate	500 A @ 3 weld/sec for 10 ms	1500 A @ 1 weld/sec for 10 ms	4000 A @ 1 weld/sec for 10ms
Setting ranges:	Current Voltage Power	Current Voltage Power	Current Voltage Power
Peak:	Current Voltage Power	Current Voltage Power	Current Voltage Power
Output regulation versus line voltage variance	2%		
Output regulation versus load resistance variance	2%		
Weld Period Ranges	Ranges (ms)		Resolution (steps)
First / second pulse, up/downslope and cool periods	0 - 99.9		0.1(0 - 9.9), 1(10 - 99)
Squeeze/hold periods	0 - 999		1
Output accuracy	Current Voltage Power	Current Voltage Power	Current Voltage Power

FEATURES			
WELD HEAT PROFILE CONTROL	UB-500A	UB-1500A	UB-4000A
Weld pulse control Programmable weld pulse segments Weld schedule memory Weld schedule chaining	Dual pulse with independent control of current, voltage or power on each pulse Squeeze, upslope 1, weld 1, downslope 1, cool, upslope 2, weld 2, downslope 2, hold Save up to 99 different weld schedules, protected from unauthorized changes Allows automatic linking of weld schedule sequence		
BUILT-IN WELD MONITOR FUNCTIONS			
Measurement parameters Graphic display Measurement selection	Current, voltage, power, resistance on each pulse. Back-lit LCD displays programmed and actual weld current, voltage, power, or resistance and upper and lower limits Peak or average		
Current measurement range/accuracy Voltage measurement range/accuracy Power measurement range/accuracy	0 – 500 A, ±2% of setting ±5 A 0 – 9.99 V, ±2% of setting ±0.05 V 0 – 4.99 kW, ±5% of setting ±10 W	0 – 1500 A, ±2% of setting ±10 A 0 – 9.99 V, ±2% of setting ±0.05 V 0 – 9.99 kW, ±5% of setting ±40 W	0 – 4000 A, ±2% of setting ±20 A 0 – 9.99 V, ±2% of setting ±0.05 V 0 – 25.0 kW, ±5% of setting ±50 W
Alarms Programmable weld energy limit Weld pre-check Active part conditioner	Display alert, five user programmable AC/DC relays; audio alarm Terminates weld energy when exceeding user defined current, voltage, or power limits Inhibits second weld pulse when first test pulse exceeds user programmed limits First pulse current limit in constant power		
I/O AND DATA COMMUNICATIONS			
Input	Input isolation Control voltages Foot switch initiation Firing switch input Remote control RS-232 Electrode voltage	All inputs and outputs are fully isolated +24 V, sourcing or sinking inputs 1-level foot switch, 2-level foot switch Mechanical or opto firing switch Remote weld schedule select, process inhibit, emergency stop, alarm reset Change weld schedules and individual parameters Weld voltage signal for voltage feedback operation (0 to 10 V peak)	
Output	Monitor Weld head air valve driver Alarm relays	RS-232 weld data out 24 VAC, 0.5 A; timing controlled by UB Series Power Supply Five user-programmable opto isolated relays; programmable normally open or normally closed contacts: 30 VDC at 0.5 A Conditions: weld, end of weld, alarm, out of limits, ready, weld counter	

## WEIGHT & DIMENSIONS

Dimensions (L x W x H)	15 in x 8.4 in x 12 in (381 mm x 213 mm x 305 mm)
Weight	49 lb (22 kg)



### AMADA WELD TECH INC.

**USA**  
1820 S. Myrtle Ave. • Monrovia, CA 91016 US  
T: (626) 303-5676  
[info@amadaweldtech.com](mailto:info@amadaweldtech.com) • [www.amadaweldtech.com](http://www.amadaweldtech.com)  
ISO 9001 Certified Company • 24/7 Repair Service: 1-866-751-7378

#### AMERICAS

**AMADA WELD TECH**  
(Midwest Technical Center)  
Detroit, Michigan  
T: (248) 313-3078  
[midwestsales@amadaweldtech.com](mailto:midwestsales@amadaweldtech.com)

**AMADA WELD TECH**  
(Mexico Office)  
El Paso, Texas  
T: (915) 881-8765  
[mxsales@amadaweldtech.com](mailto:mxsales@amadaweldtech.com)

#### EUROPE

**AMADA WELD TECH**  
GmbH  
Munich, Germany  
T: +49-89-839403-0  
[info@amadaweldtech.com](mailto:info@amadaweldtech.com)

#### ASIA

**AMADA WELD TECH CO., LTD.**  
Isehara, Japan  
T: +81-4-7125-6177  
[sales@miyachi.com](mailto:sales@miyachi.com)

**AMADA WELD TECH**  
**SHANGHAI CO., LTD.**  
Shanghai, China  
T: +86-21-6448-6000  
[syli@amadaweldtech.com](mailto:syli@amadaweldtech.com)  
[zqzhang@amadaweldtech.com](mailto:zqzhang@amadaweldtech.com)

**AMADA WELD TECH KOREA CO., LTD.**  
Seoul, Korea  
T: +82-31-8015-6810  
[sales@amadaweldtech.co.kr](mailto:sales@amadaweldtech.co.kr)

**AMADA WELD TECH TAIWAN CO., LTD.**  
Taipei, Taiwan  
T: +886-2-2585-0161

**AMADA (THAILAND) CO., LTD.**  
Bangkok, Thailand  
T: +66-2170-5900  
[info@amada.co.th](mailto:info@amada.co.th)

**AMADA VIETNAM CO., LTD.**  
Ha Noi, Vietnam  
T: +84-4-6261-4583

**AMADA WELD TECH**  
**INDIA PVT., LTD.**  
Bangalore, India  
T: +91-80-4092-1749  
[info@miyachiindia.com](mailto:info@miyachiindia.com)

Specifications subject to change without notice. Copyright© 2022 AMADA WELD TECH INC. The material contained herein cannot be reproduced or used in any other way without the express written permission of AMADA WELD TECH INC. All rights reserved.

follow us on:

